


## FICHA DE PRODUCTO / PRODUCT SHEET

# Serie INGO PLUS baño-ducha / bath and shower

ref: 7131000

Grupo de baño-ducha monomando para instalación mural.  
 Bath and shower group for wall mounting.

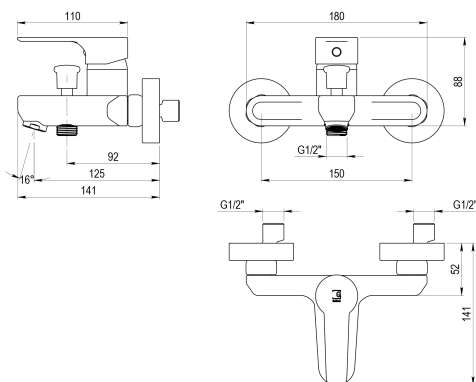

## CARACTERÍSTICAS


- Temperatura admisible de agua: los materiales que componen las piezas de los grifos pueden soportar una temperatura máxima de 70°C.
- Grifo fabricado en latón con acabado cromado.
- Presión mínima de uso: 0,5 bar.
- Accionamiento mediante maneta.
- Cartucho sellado con discos cerámicos de diámetro 35 mm.
- Caudal de 21 l/min a 3 bar y máxima apertura.
- Entradas hembra de 3/4" a 1/2" con excéntrica y embellecedor.
- Selección de salida mediante inversor.
- Suministrado con accesorios de ducha.

## FEATURES


- Permissible water temperature: the component materials of the tap parts can withstand a maximum temperature of 70 ° C.
- Brass construction with polish chrome finished.
- Minimum usage pressure: 0,5 bar.
- Operation by lever.
- One – piece cartridge with ceramic discs. Cartridge diameter 35 mm.
- Flow rate at 3 bar and maximum opening 21 l/min.
- 3/4" to 1/2" female inlet with eccentric cam and trim.
- Output selection by inverter.
- Supplied with shower accessories.

## RECAMBIOS - SPARE PARTS

**Cartucho**  
**Cartridge**  
 Ref. meca-40-75



**Maneta**  
**Lever Set**  
 Ref. mane-40crrc



**Maneral**  
**Handshower**  
 Ref. 67500



## NORMATIVA

- Certificado ISO 9001:2008.
- Pruebas dimensionales, estanqueidad e hidráulicas. Cumpliendo con el CTE.
- Resistencia a la niebla salina 200 horas, según norma ISO-9227.
- Tratamiento exterior: Niquelado y cromado conforme a la norma EN-248.
- Materiales: El latón empleado en la fabricación de nuestros grifos cumple las normas EN-12164, EN-12165 y EN-1982.
- Certificado N de AENOR conforme a la norma Europea de grifería sanitaria EN-817.

## STANDARS

- Certificado ISO 9001:2008.
- Dimensional, leaks and hydraulic checks. Complying with the CTE.
- EN ISO 9227: Corrosion test in artificial atmospheres. Salt spray test.
- EN 248: Sanitary tapware. General specifications for electrodeposited coatings of Ni-Cr.
- Materials: Brass used in the manufacture according to EN-12164, EN-12165 and EN-1982 standards.
- AENOR certified to European standard EN-817 sanitary taps.